



210 Bar Standard Cylinder Mounting : Clevis Mount


Cap Fixed Clevis
(ISO MP1)

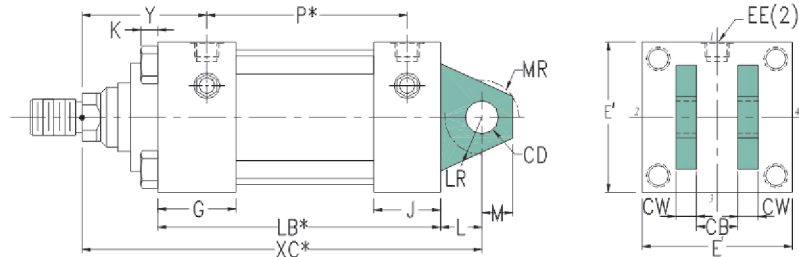

Cap Fixed Eye
(ISO MP3)

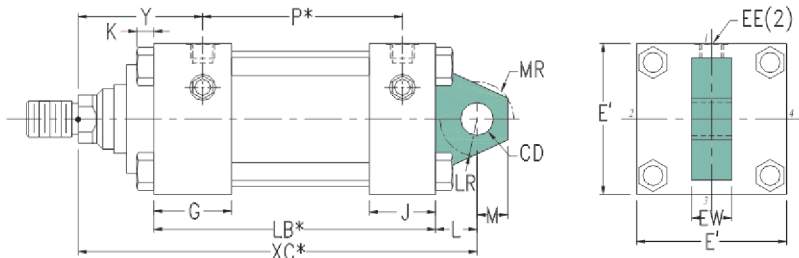

Cap Spherical Bearing
(ISO MP5)

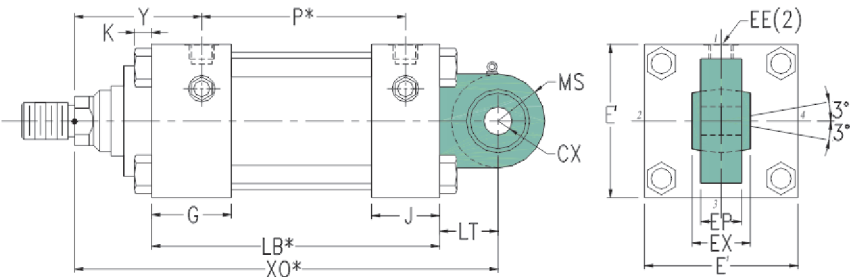

Mounting Dimensions

Bore Dia.	CB	CD	Hole Tol.	Pin Tol.	CW	CX	E	EE BSP/G inches	EP	EW	EX	G	J	K	L	LB*	LR	LT	M	MR	MS	P*	XC*	XO*	Y
25	12	10	+0.036 -0.000	-0.016 -0.043	6	12	40 ¹	1/4	8	12	10	40	25	4	13	89	12	16	10	12	20	53	127	130	50
32	16	12	+0.043 -0.000	-0.016 -0.043	8	16	45 ¹	1/4	11	16	14	40	25	5	19	93	17	20	12	17	22.5	56	147	148	60
40	20	14	+0.043 -0.000	-0.016 -0.043	10	20	63	3/8	13	20	16	45	38	6.5	19	118	17	25	14	17	29	73	172	178	62
50	30	20	+0.052 -0.000	-0.020 -0.053	15	25	75	1/2	17	30	20	45	38	10	32	118	29	31	20	29	33	74	191	190	67
63	30	20	+0.052 -0.000	-0.020 -0.053	15	30	90	1/2	19	30	22	45	38	10	32	120	29	38	20	29	40	80	200	206	71
80	40	28	+0.052 -0.000	-0.020 -0.053	20	40	115	3/4	23	40	28	50	45	13	39	139	34	48	28	34	50	93	229	238	77
100	50	36	+0.062 -0.000	-0.025 -0.064	25	50	130	3/4	30	50	35	50	45	13	54	146	50	58	36	50	62	101	257	261	82
125	60	45	+0.062 -0.000	-0.025 -0.064	30	60	165	1	38	60	44	58	58	18	57	175	53	72	45	53	80	117	289	304	86
160	70	56	+0.074 -0.000	-0.030 -0.076	35	80	205	1	47	70	55	58	58	22	63	188	59	92	59	59	100	130	308	337	86
200	80	70	+0.074 -0.000	-0.030 -0.076	40	100	245	1 1/4	57	80	70	76	76	24	82	242	78	116	70	78	120	165	381	415	98

All dimensions in millimetres unless otherwise stated.

* Add stroke to all starred dimensions.

¹ Head depth increased by 5mm to accommodate port on 25mm and 32mm bore cylinders.